


Dyna Sole

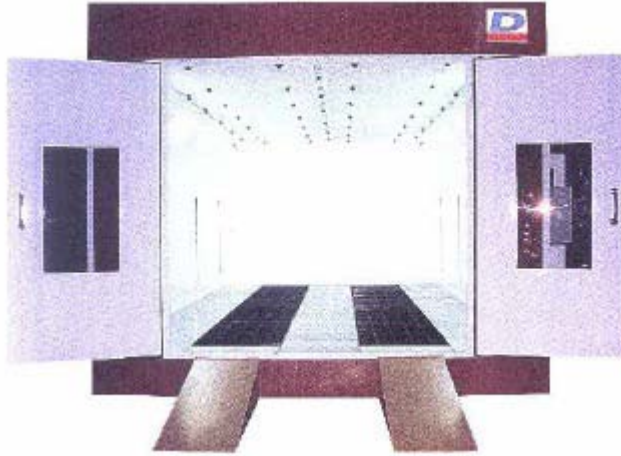

TECHNICAL SPECIFICATION :

Type of Paint Booth	Positive Pressure Paint Booth
Air Flow	Vertical Down Draft
Working Size of the Booth	Length : 7,000 mm, Width : 3,950 mm, Height : 2,600 mm
External Size of the Booth	Length : 7,130 mm, Width : 4,050 mm, Height : 3,150 mm (3,500 mm with Metal Base)
Size of Service Door	Height : 1,800 mm, Width : 600 mm
Booth construction	50 mm thick Pre-fabricated double skinned panels in GI , insulated with non-combustible mineral fibre.
Thickness of Metal Base	2.5 mm Sheet
Illumination	Top Left - 4 sets(40W tubes 4 Nos. in each set)Right-- 4 sets(40W tubes 4 Nos. in each set),Side Panels - Left- 4 sets(40W tubes 2 Nos. in each Set vertically), Right – 4 sets.
Illumination Level	More Than 1000 Lux
Air Inlet Blower	Double Inlet Forward Curved Fan for silent function. 22,000 m ³ /hr, 10 HP motor, 1440 rpm, 3phase, 415 V
Exhaust Blower	Double Inlet Forward Curved Fan for silent function. 15,000 m ³ /hr, 5 HP motor, 1440 rpm, 3phase, 415 V
Heat Exchanger	Made of Stainless Steel
Type of Burner	Automatic (Imported)
Heat output at full load	1,20,000 K.Cal/hr.
Fuel	HSD
Filters	Non wooven (Imported)